

High Frequency Chip Resistors

■RFD series

Features

- A resistor that takes advantage of the characteristics of thin films, and supports a wide range of frequencies from DC to 67 GHz.
- Small 0603 size
- Face-down mounting type



Applications

- Low noise high frequency transmission and reception circuit
- High frequency termination circuit
- High frequency attenuation circuit

◆Part numbering system

RFD 0603 P - 50R0 - D - T1

Series code

Size:0603

TCR P: $\pm 25\text{ppm}$

Packaging quantity:
T5(5,000pcs), T1(1,000pcs)



Resistance tolerance D : $\pm 0.5\%$

Resistance values : 50Ω, 75Ω, 100Ω

◆Electrical Specification

Type	RFD0603
Impedance	50Ω, 75Ω, 100Ω
Operating frequency	DC~67GHz
rated power	50mW
Rated operating temperature	70°C
Operating temperature	-40°C~+125°C
Packaging quantity	1.000pcs/reel(T1) 5.000pcs/reel(T5) 10.000pcs./reel (T10)


◆Dimensions

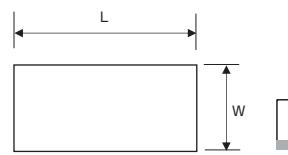


Type (mm)	Size (inch)	L	W	t	a	b
RFD0603	0201	0.60 ± 0.05	0.30 ± 0.05	0.22 ± 0.05	0.24 ± 0.05	0.14 ± 0.05

(unit : mm)

◆ Recommended land patterns(soldering footprints)

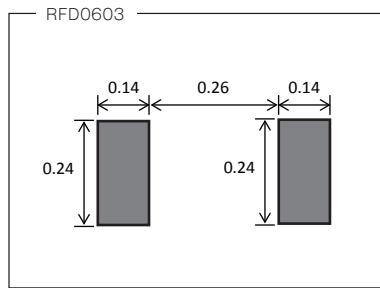

◆ Derating Curve

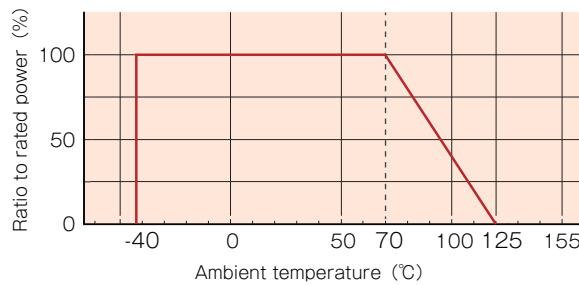

◆ High frequency characteristics

