ISABELLENHÜTTE
Innovation by Tradition

ISA-WELD® // PRECISION RESISTORS

BVN (1216)

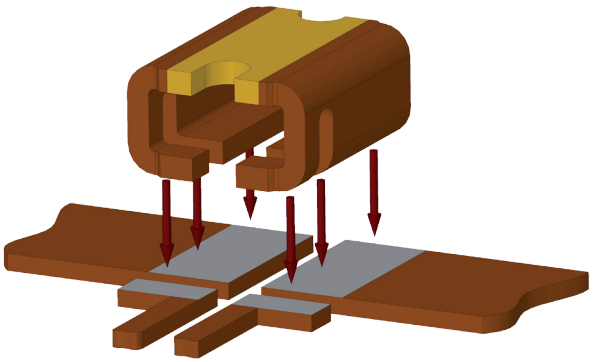

Features

- Constant current up to 100 A (0.5 mOhm)
- 5 W power rating up to 130 °C
- Four terminal-configuration
- Excellent long-term stability
- Ideal suited for mounting on DBC / IMS substrate
- High application temperature range -55 to +170 °C
- Max. solder temperature up to 350 °C / 30 sec
- RoHS 2011/65/EU compliant
- AEC-Q200 qualified

RoHS

Applications

- Current sensor for power hybrid applications
- High current applications for the automotive market
- Frequency converters
- Power modules

Technical data

Resistance values	**mOhm**	**0.5**	**1**
Material		ZERANIN®30	MANGANIN®
Tolerance	**%**	1 / 5	
Temperature coefficient (20-60 °C)	**ppm/K**	<50	
Applicable temperature range	**°C**	-55 to +170	
Power rating $P_{100\,°C}$	**W**	5	3
Internal heat resistance (R_{thi})	**K/W**	8	15
Inductance	**nH**	<2	
Stability (at rated power) deviation after 2000h, T_K = Terminal temperature		<0.5% (T_K=100 °C) <1.0% (T_K=130 °C)	

Ordering code

BVN - Z - R0005 - 1.0

- Tolerance
- Resistance value [Ohm] / „R“ represents decimal point
- Material (ZERANIN®30)
- Type

BVN (1216)

Mechanical dimensions and pcb-layout proposal (Reflow-soldering) [mm]

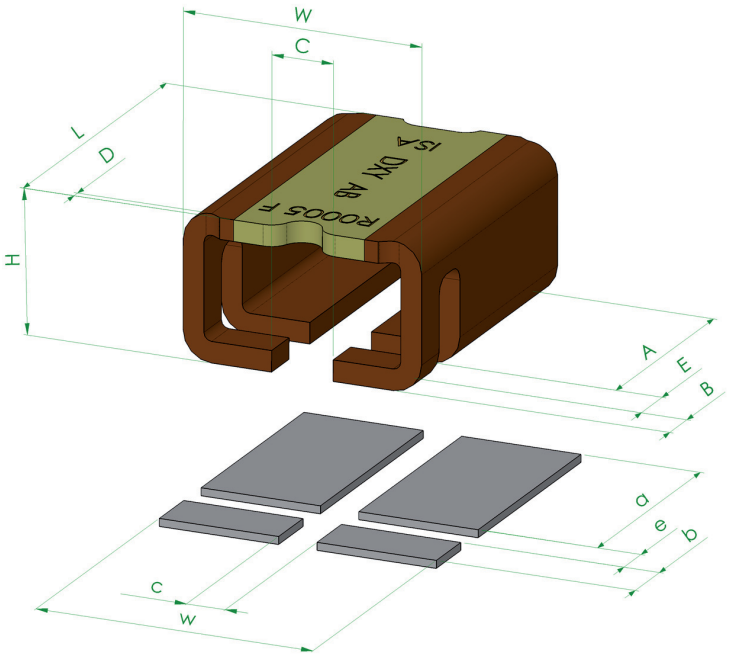

Z-YE-846b

type:	value / mOhm	L	W	H	A	B	C	D	E
BVN-Z-R0005	0.5	4.1 -0.3	3.1 -0.35	1.9 -0.35	2.7 ±0.1	0.5 ±0.1	0.8 +0.3	0.1	0.6 +0.15
BVN-M-R001	1	4.1 -0.3	3.1 -0.35	1.9 -0.35	2.7 ±0.1	0.5 ±0.1	0.8 +0.3	0.1	0.6 +0.15

solder pad type:	w	a	b	c	e
BVN	3.6	2.95	0.7	0.6	0.5

Specification

Parameters	Test conditions	Specified values
Temperature Cycling	2000 cycles (-55 °C to +150 °C)	±0.5 %
Low Temperature Storage and Operation	-65 °C for 250 h	±0.1 %
Resistance to Soldering Heat	260 °C for 10 sec / 8h steam aging	n.a.
Moisture Resistance	MIL-STD-202 method 106	±0.1 %
Mechanical Shock	100 g, 6 ms half sine	±0.2 %
Vibration, High Frequency	10 g, 10-2000 Hz	±0.2 %
Operational Life	2000 h, T_K max at rated power	±1.0 %, T_K = 130 °C
High Temperature Exposure	2000 h / 170 °C	±1.0 % (in covered condition)*
Bias Humidity	+85 °C, 85 r.F., 1000 h	±0.5 %

* for MANGANIN® and ZERANIN®30

BVN (1216)

Recommended solder profile

Reflow- and IR-soldering				
Temperature	**°C**	260	255	217
Time	**sec**	peak	40	90

Tape and reel information

Specification		DIN EN 60286-3
Tape width	**mm**	12
Parts per reel	**pcs**	3000

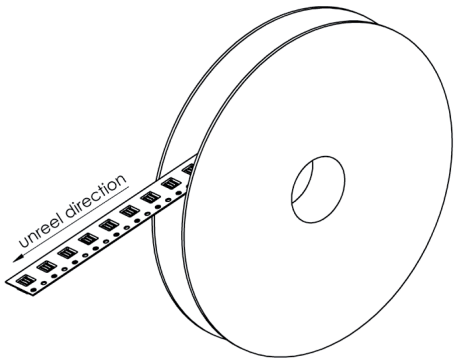

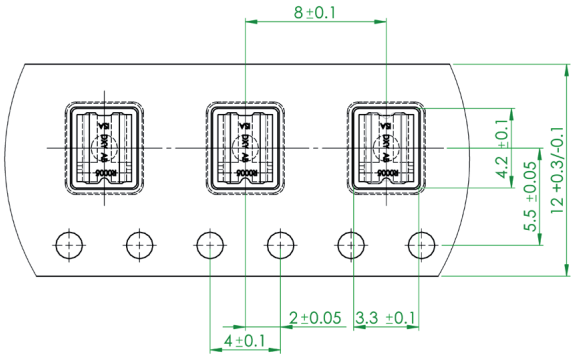

Temperature dependence of the electrical resistance BVN-Z-R0005

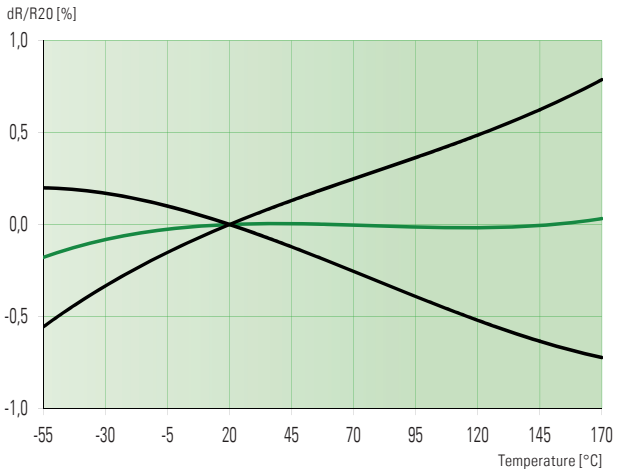

Limiting curve

Typical temperature dependence of a BVN resistor

Power derating curve

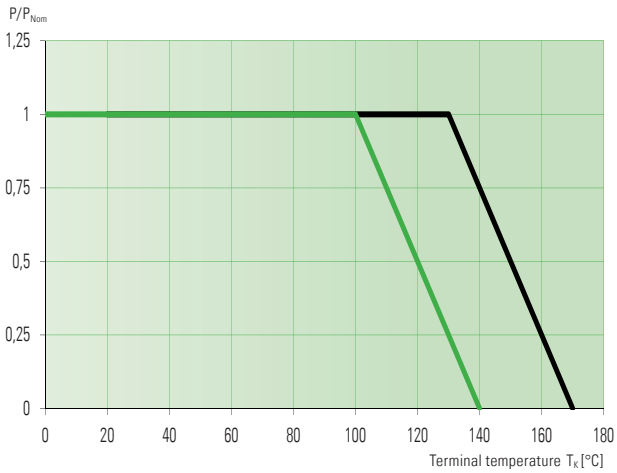

Stability <1.0 %

Improved stability <0.5 %

BVN (1216)

Maximum pulse energy respectively pulse power for permanent operation

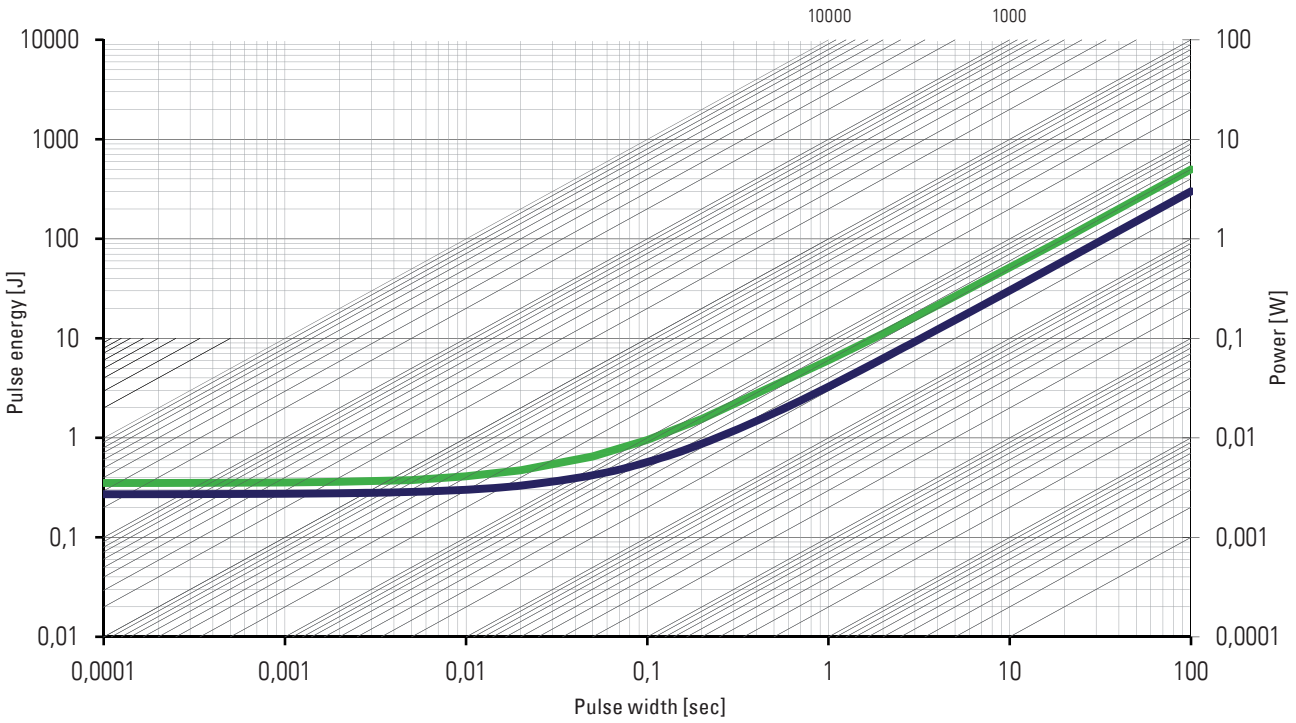

Disclaimer // All products, product specifications and data are subject to change without notice.

The product specifications do not expand or otherwise modify Isabellenhütte's terms and conditions of sale, including but not limited to, the warranty expressed therein. Isabellenhütte makes no warranty, representation or guarantee other than as set forth in its terms and conditions of sale.

Information provided in datasheets and/or specifications may vary from actual results in different applications. Any statements made by Isabellenhütte regarding the suitability of products for certain types of applications are based on its knowledge of typical requirements that are often placed on its products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in the application intended.

No license, express or implied, or otherwise, to any intellectual property rights is granted by this document.

Any and all liability arising out of the application or use of any product shall be as set forth in Isabellenhütte's terms and conditions of sale.